

CR-32B Cast Iron Wedge Gate Sluice Valve Flanged, Non Rising Type (ISI Marked)

Product Description

HSN 84818030

Product : 'SANT' Cast Iron Sluice Valve
 Product Standard : IS:14846
 Pressure / Class / Rating : PN 16 PD Type
 Body Material cum Standard : Cast Iron IS:210 Gr.FG200
 Description : Bolted Bonnet, Inside Screw & Non Rising Stem
 Type of Seat : Renewable seat
 Type of Disc : Solid wedge
 Trim : Cu-Alloy Rings, stem SS (12 Cr.12)
 Gland Packing : Rubber 'O' Ring
 End Details : Flanges as per IS:1538 FF drilled



Testing & Certification

Body Test Pressure : 2.4MPa (Hyd.)
 Seat Test Pressure : 1.6MPa (Hyd.)

Our Works' Test Certificate is furnished with every supply.

Application


Water

Materials of Construction

Components	Materials	Specifications
Body, Cap, Gland, Bonnet, Wedge, Handwheel, Stuffing Box	Cast Iron	IS:210 Gr.FG200
Screw, Bolts, Nuts	Carbon Steel	IS:1363
Stem	S.S.	IS:6603: 12cr12
Gland Packing	Rubber 'O' Ring	IS:638 Type B
Body, Seat, Wedge Ring, Wedge Nut	Leaded Tin Bronze	IS:318 Gr.LTB2
Gasket	Rubber	IS:638 Type B

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F	H (Approx.)	ØW (Approx.)
50	2	178±2	345	280
65	2.1/2	190±2	360	280
80	3	203±2	400	280
100	4	229±2	450	360
125	5	254±2	480	360
150	6	267±2	545	360
200	8	292±2	675	450
250	10	330±3	770	640
300	12	356±3	875	640

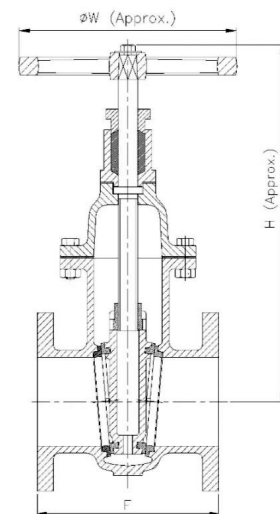

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.