

XD371XL Lugged Wafer Butterfly Valve with Tamper Switch PN16, UL/FM/VdS Approved

Product Description

Product Certification

UL Listed / FM Approved (EX 26413)

Design Standard

BS EN 593

Top Flange Standard

ISO 5211

Working Pressure

PN16

Temperature Range

0°C - 100°C

Coating

Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

Flange Specifications

BS EN 1092-2 PN10/PN16, AMSE B16.1 CL125, ASME B16.5 CL 150, JIS B2210 10K




Materials of Construction

Part No.	Part	Standard Specification
1	Body	EN-GJS-450-10
2	O-Ring	NBR
3	Stub Shaft	SS431
4	Disc	EN-GJS-450-10+EPDM
5	Hex Nut	Carbon Steel Zinc plated
6	Signal Gearbox	Body:EN-GJS-450-10
7	Drive Shaft	SS431
8	O-Ring	NBR
9	End Face Seal	EPDM

Dimensions (in mm)

Inch	mm	A+B+L	C	H	W	ØD (PN16)	N1-M1 (P.C.D.)
2"	50	328	43	202.2	125	125	4-M16
2.5"	65	346.5	46	202.2	125	145	4-M16
3"	80	361	46	202.2	125	160	8-M16
4"	100	393.5	52	202.2	125	180	8-M16
5"	125	424.5	56	202.2	125	210	8-M16
6"	150	458	56	215	225	240	8-M20
8"	200	530	60	274	225	295	12-M20
10"	250	591.5	68	274	225	355	12-M24
12"	300	669	78	293.5	225	410	12-M24

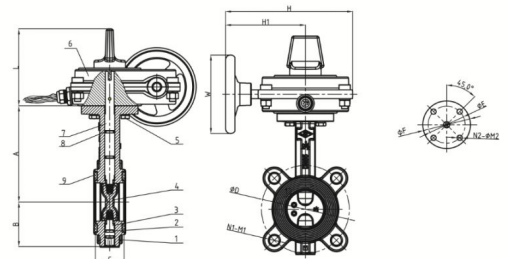

Notes

1. Product images are for illustration purposes only. Actual product may vary.

2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.