

## IBR-10B Bronze Asbestos Packed Water Level Gauge Flanged (IBR Approved)

### Product Description

HSN 90261020

Product : 'SANT' Bronze Asbestos Packed Water Level Gauge  
Type of Pattern : Standard Pattern  
Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B  
Description : Right Hand Type / Left Hand Type  
Gland Packing : Lubricated Asbestos  
End Details : Flanges as per BS 10 Table F F.F. undrilled

### Testing & Certification

Hydraulic Test Pressure : 300 Psig.Hyd.  
Working Pressure : Max.BOP 150 Psig.(10.54Kg/cm<sup>2</sup>)  
Maximum Working Temperature: 225°C (435°F)

Test Certificate in Form III-C as per IBR is furnished with every supply.

### Application

Water	Steam
-------	-------




### Materials of Construction

Components	Materials	Specifications
Body, Plug, Cover Nuts, Drain Cock & Back Nuts	Bronze	IBR 282(a)(iv) Gr.B
Packing	Lubricated Asbestos	—

### Dimensions (in mm)

Nominal Size	Size (Inches)	A	ØB
10	3/8	80	12.7
15	1/2	80	19
16	5/8	99	25
20	3/4	99	25

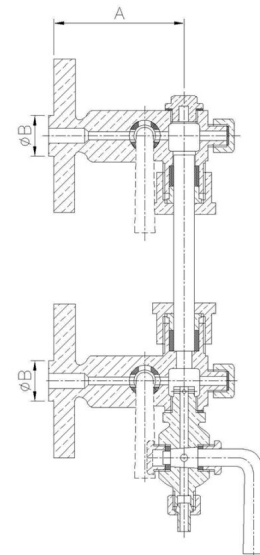

### Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.