

CI-7B Cast Iron Y-Type Strainer Screwed (IBR Approved)

Product Description

HSN 84818030

Product : 'SANT' Cast Iron Y-Type Strainer
Type of Pattern : Y-Type
Body Material cum Standard : Cast Iron IBR 86 to 93 Gr.A
Description : Bolted Cover
Trim : SS 304 Screen having 1.2 mm dia perforation
End Details : Female BSP Parallel threads to BS 21

Testing & Certification

Test Pressure : 26Kg/cm²g (370 Psig.) Hyd.
Working Pressure : Max BOP 13Kg/cm²g (185 Psig.) at 220°C Steam

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

Water	Oil	Steam
-------	-----	-------




Materials of Construction

Components	Materials	Specifications
Body, Bonnet	Cast Iron	IBR 86 to 93 Gr.A
Drain Plug for 25mm & above	Bronze / SS	IBR 282(a)(iv) Gr.B / AISI410
Strainer	S.S.	AISI-304
Gasket	Compressed Asbestos Fibre	IS:2712 Gr.C
Fasteners	Mild Steel	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F±2
15	1/2	76
20	3/4	98
25	1	133
32	1.1/4	133
40	1.1/2	178
50	2	222

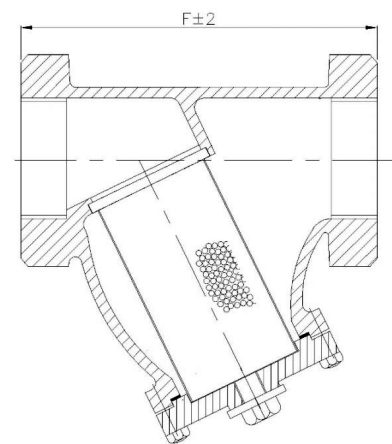

Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.