

IBR-15 Bronze Sight Glass Screwed (IBR Approved)

Product Description

HSN 84818030

Product : 'SANT' Bronze Sight Glass

Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B

Description : With toughened glass single window upto & including 25mm size & double window for size above 25mm

End Details : Screwed male BSP Taper threads to BS 21.

Testing & Certification

Hydraulic Test Pressure : 500 Psig.Hyd.

Working Pressure : Max.BOP 250 Psig.(17.58Kg/cm²)

Maximum Working Temperature : 435°F (225°C)

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

Water	Oil	Steam
-------	-----	-------




Materials of Construction

Components	Materials	Specifications
Body & Ring	Bronze	IBR 282(a)(iv) Gr.B
Glass	Toughened Glass	—
Gasket	Compressed Asbestos Fibre	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F	H
15	1/2	89	43
20	3/4	92	48
25	1	102	50
32	1.1/4	105	98
40	1.1/2	110	110
50	2	115	122

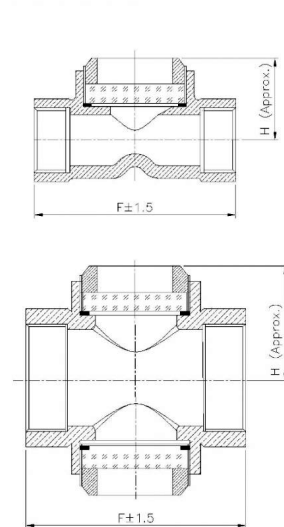

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.