

IBR-19 Bronze Inspectors Test Gauge Valve (IBR Approved)

Product Description

HSN 84818030

Product : 'SANT' Bronze Inspectors Test Gauge Valve with bend
Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B
Description : M 20 x 1.5 Pitch threads for Gauge connections
End Details : Screwed female BSP Parallel threads to BS 21.

Testing & Certification

Hydraulic Test Pressure : 500 Psig.Hyd.
Working Pressure : Max.BOP 250 Psig.(17.58Kg/cm²)
Maximum Working Temperature : 435°F (225°C)

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

| | |
|-------|-------|
| Water | Steam |
|-------|-------|




Materials of Construction

| Components | Materials | Specifications |
|--|-----------|---------------------|
| Body, Plug, Nut & Nipples, Washers | Bronze | IBR 282(a)(iv) Gr.B |
| Seal Under Inspector's Connection Plug | Lead | — |

Dimensions (in mm)

| Nominal Size | Nominal Size (Inches) | A (Approx.) | B (Approx.) |
|--------------|-----------------------|-------------|-------------|
| 10 | 3/8 | 82.5 | 140 |
| 15 | 1/2 | 82.5 | 140 |

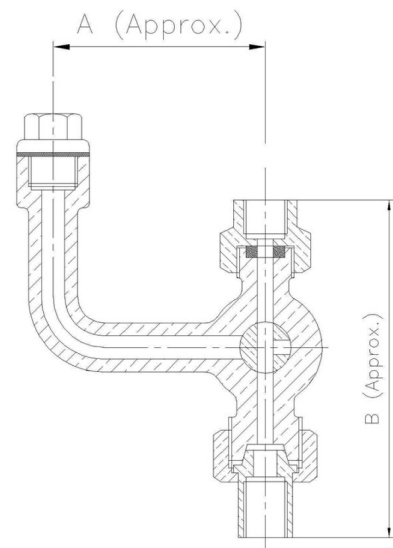

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.