

IBR-21 Bronze Pressure Relief Valve Screwed, Open Discharge

Product Description

HSN 84814000

Product : 'SANT' Bronze Relief Valve
 Type of Pattern : Straight Type
 Body Material cum Standard : GM (IS:318 Gr.LTB2)
 Description : Spring Loaded Open Discharge
 Type of Seat : Integral seat
 Type of Disc : Renewable disc
 Trim : Cu-Alloy
 End Details : Screwed male BSP Parallel threads to BS 21.



Testing & Certification

Hydraulic Test Pressure : 300 Psig.Hyd.
 Note : Please advise set pressure while placing order
 Working Pressure : Max.150 Psig.

Our Work's Test Certificate is furnished with every supply.

Application


Water	Air
-------	-----

Materials of Construction

Components	Materials	Specifications
Body, Spring Chamber, Valve Disc, Spring Discs, Spindle, Check Nut & Adjusting Screw	Leaded Tin Bronze	IS:318 Gr.LTB2
Spring	Spring Steel	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	A (Inches)	H (Approx.)
8	1/4	1/4	160
10	3/8	3/8	160
15	1/2	1/2	160
20	3/4	3/4	170
25	1	1	175
32	1.1/4	1.1/4	215
40	1.1/2	1.1/2	240
50	2	2	265
		BSP	

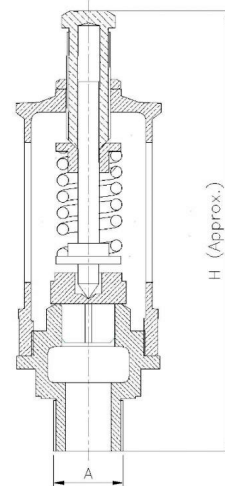

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.